



TECHNICAL DATA mechanical

- Programmable: Resolution, Preset, Direction
- Allen Bradley compatible
- Scaleable
- Preset-Funktion
- Diagnostic LED
- Option: display „tico“

Housing diameter	58 mm
Protection class shaft input	IP 64 or IP 67
Protection class housing	Connection Bushaube IP 67
Flange	Synchro flange, clamping flange, hubshaft with tether, square flange
Shaft diameter	Solid shaft 6 mm, 10 mm; hub shaft 10 mm, 12mm
Max. speed	12000 min ⁻¹ (short term), 10000 min ⁻¹ (continuous)
Starting torque	≤ 0.5 Ncm
Moment of inertia	3.8 10 ⁻⁶ kgm ²
Spring tether (hollow shaft)	
Tolerance axial	± 1.5 mm
Tolerance radial	± 0.2 mm
Max. shaft load	axial 40 N / radial 60 N
Vibration resistance (IEC 68-2-6)	100 m/s ² (10 - 500 Hz)
Shock resistance (IEC 68-2-27)	1000 m/s ² (6 ms)
Operating temperature	-40...+85 °C
Storage temperature	-40...+85 °C
Material Welle	Stainless steel
Material Gehäuse	Aluminium
Weight approx.	350 g (ST), 400 g (MT)

TECHNICAL DATA electrical

Supply voltage	DC 10 - 30 V
Max. current w/o load ST/MT	220 mA/ 250 mA
EMC	Interference emission according to EN 50081-2 Interference resistance according to EN 50082-2
Interface	CAN High-Speed according to ISO/DIS 11898 CAN-Specification 2.0 A (11 Bit Identifier)
General design	as per EN 61010-Part 1, protection class III, contamination level 2, overvoltage class II
Protocol	DeviceNet according to Rev. 2.0, programmable encoder
Resolution singleturn	10 to 14 Bit
Resolution multiturn	12 Bit
Programmable	Resolution, Preset, Direction
Linearity	± ½ LSB (± 1 LSB for resolution 13, 14, 25, 26 Bit)
Output code	Binary
Updating of values	every 5 Milliseconds
MAC-ID	set via DIP switches
Baud rate	set via DIP switches to 125, 250, 500 Kbaud
Bus termination resistor	set via DIP switches
Connection	Bus cover with · 2 sealed cable exits · 4 pole M12 f. "tico" display + 2 cable screw connections · M12, 5 pole

DIMENSIONAL DRAWINGS

see chapter "Dimensional drawings ACURO industry", starting page 142

RECOMMENDED DATA TRANSFER Lead type A


Shaft resistance	135...165 Ω (3...20MHz)
Operating capacity	< 30pF/m
Loop impedance	< 110 Ω/km
Strand diameter	> 0.64 mm
Strand cross section	> 0.34 mm ²

TRANSFER SPEEDS

Segment length	kbit/s
500 m	125
250 m	250
100 m	500

STARTUP

The encoder can be easily and quickly installed and programmed with the EDS file.

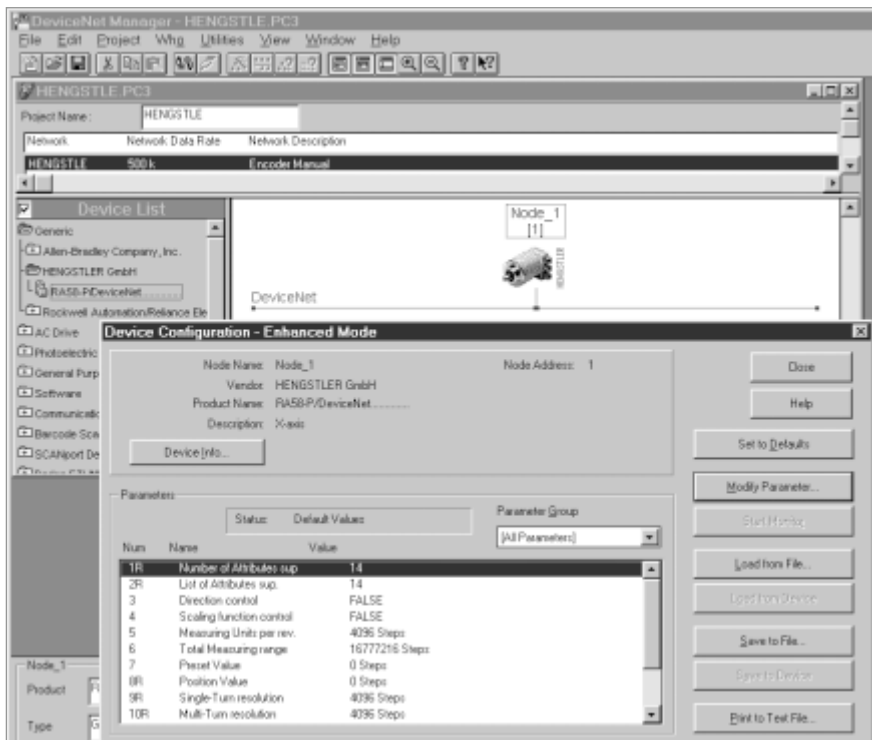

PIN ASSIGNMENT

Bus cover with 3 sealed cable exits

Terminals

No.	Signal name
1	UB in (DC 10 - 30V)
2	0 V in
3	CAN-L
4	CAN-H
5	DRAIN
6	DRAIN
7	CAN-H
8	CAN-L
9	0 V out
10	UB out (DC 10 - 30V)

PIN ASSIGNMENT

Bus cover with M12, 5 pole

Pin	Connector	Colour
1	UB in (DC 10 - 30V)	white
2	0 V in	blue
3	CAN-L	green/yellow
4	CAN-H	black
5	DRAIN	brown

ACCESSORIES

	Ordering code
EDS-file as download from our homepage	www.hengstler.de
Technical manual, German	2 565 094 (Web)
Technical manual, English	2 565 256 (Web)
Clamping eccentric for synchro flange	0 070 655
Diaphragm coupling (hub 6/6 mm)	3 520 081
Diaphragm coupling (hub 10/10 mm)	3 520 088
"Tico" display for connection T	0 731 205
Connection cable bus cover (connection T) to "tico"	3 539 575

ORDERING INFORMATION

Type	Resolution	Supply voltage	Flange, Protection, Shaft	Interface	Connection
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
AC58	0010 10 Bit ST 0012 12 Bit ST 0013 13 Bit ST 0014 14 Bit ST 1212 12 Bit MT+12 Bit ST 1213 12 Bit MT+13 Bit ST 1214 12 Bit MT+14 Bit ST	E DC 10 - 30 V	S.41 Synchro, IP64, 6x10mm S.71 Synchro, IP67, 6x10mm K.42 Clamping, IP64, 10x19.5mm K.72 Clamping, IP67, 10x19.5mm K.46 Clamping, IP64, 9.52x19.5mm K.76 Clamping, IP67, 9.52x19.5mm F.42 Hubshaft with tether, IP64, 10x19.5mm hollow shaft F.47 Hubshaft with tether, IP64, 12x19.5mm hollow shaft F.46 Hubshaft with tether, IP64, 9.52x19.5mm hollow shaft Q.42 Square, IP64, 10x19.5mm Q.72 Square, IP67, 10x19.5mm Q.46 Square, IP64, 9.52x19.5mm Q.76 Square, IP67, 9.52x19.5mm	VD DeviceNet	S M12, 5 pole radial T Bus cover with 4 pole M12 for "tico" display + 2 cable screw connections Z 3 cable screw connections

Preferably available versions are printed in bold type.